

Part Number	Nominal Size HxWxD	CFM Capacity @ 300 fpm	Case Qty	Shipping Wt.
11105	12x24	600	24	19
11106	15x20	625	24	19
11110	16x20	670	24	22
11113	16x25	833	24	24
11125	18x24	900	24	26
11119	20x20	833	24	26
11121	20x24	1000	24	29
11122	20x25	1042	24	29
11127	24x24	1200	24	31
11133	25x25	1302	24	34


Characteristics	2 Ply Panels/Links
Filter Media	2 layers of 100% synthetic fibers
Internal Frame	9 gauge wire
Flammability	UL900 Class 2
Recommended Final Resistance	1.0" w.g.
Maximum Temperature	120 °F
Actual Dimensions of Internal Frame	1/2" under nominal size
Air Entry	15 denier fiber with wet tack
Air Exit	6/3 denier blend with tack

YOUR APPROVAL OF THIS PRINT AUTHORIZES FILTRATION GROUP, INC. TO PROCEED WITH MATERIAL PROCUREMENT, TOOLING AND PRODUCT FRABRICATION. ANY CHANGES MADE AFTER APPROVAL MAY INCUR FURTHER EXPENSES TO THE CUSTOMER.

For Sales Only

Customer Information: \_\_\_\_\_

Item Number: \_\_\_\_\_

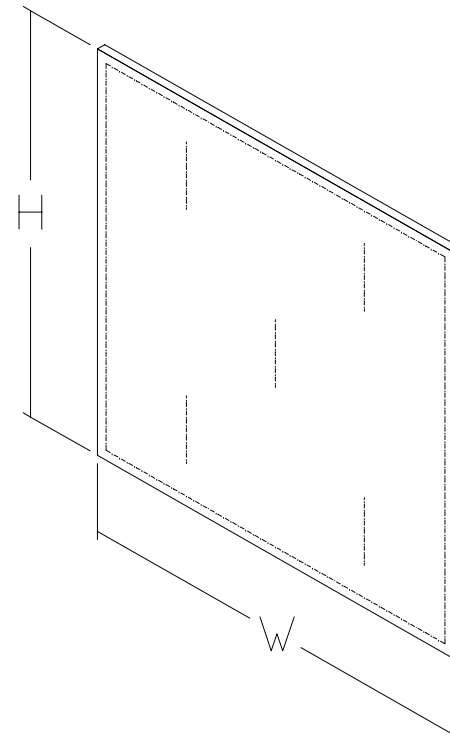

For Non-Standard Sizes, Please Consult the Factory.

\_\_\_\_\_ (A) X \_\_\_\_\_ (H) X \_\_\_\_\_ ~3/4" (D)

Please Specify Size as Nominal or Exact \_\_\_\_\_

Customer Initial and Date for Non-Standard Size \_\_\_\_\_

**Filtration Group, Inc.**  
**912 East Washington Street**  
**Joliet, Illinois 60433**

**Heat Seal**

2 Ply Panels/Links				
DR:	AL	Date:	6/11/2002	Drawing Number:
CK:		Date:		<b>SD-HS-2PLY</b>
				Revision: <b>00</b>