






FILTRATION GROUP FP MINI-PLEAT FILTER

Dimensions and Performance Data			
Nominal Size HxWxD	Actual Size HxWxD	Approximate Weight (lbs.)	Media Area (sq. ft.)
12 x 24 x 12	11-3/8 x 23-3/8 x 11-1/2	5.7	97
20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	8.4	120
20 x 24 x 12	19-3/8 x 23-3/8 x 11-1/2	9.4	162
24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	11.0	193

Specifications
Filter frame shall be comprise of 100% high impact plastic
Filter packs shall be attached to plastic component with polyurethane to prevent bypass
Filter media shall be comprised of 100% wet laid microfiberglass
Filter maximum continuous operating temperature of 150°F
Filter shall be able to withstand 100% Relative Humidity
Filter shall conform to UL 900 Classified
Filter recommended final resistance is 2.0" W.G.

Performance @ 2000 cfm per ASHRAE 52.2-2007				
FP Model	11	14	15	R
MERV	11	14	15	16
Initial Resistance (in. W.C.)	0.20	0.28	0.34	0.77
Initial DOP @ 0.3 μm	N/A	N/A	89%	98%

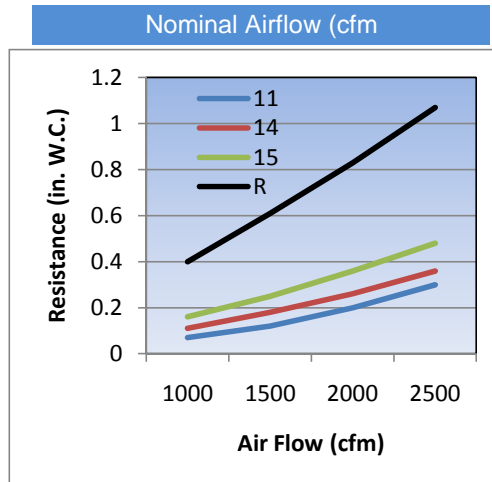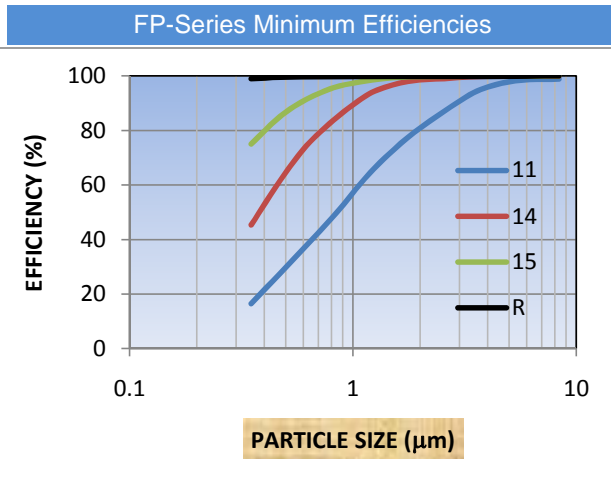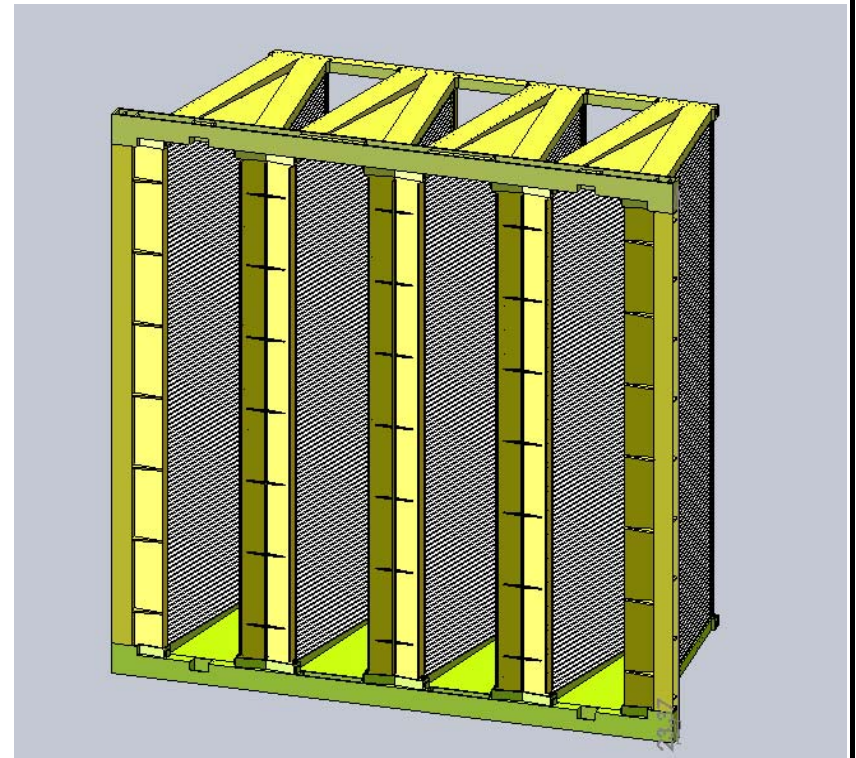

Options
1/4" Thick Gasketing - Upstream, Downstream or Side
Metal Double Header
Full Metal Wrap
Polyester Glove for Upstream and Downstream



Phone: 877-FGI-TEAM (344-8326)
 fax: 800-518-1162
www.filtrationgroup.com
 e-mail: aerostar@filtrationgroup.com