


For Sales Only

Customer Information: _____

Item Number: _____


Part Number	Nominal Size HxWxD	Actual Size HxWxD	CFM Capacities
21256	12x24x2	11-3/8 x 23-3/8 x 1 3/4	1000
21261	16x20x2	15-1/2 x 19-1/2 x 1 3/4	1100
21262	16x24x2	15-3/8 x 23-3/8 x 1-3/4	1335
21263	16x25x2	15-1/2 x 24-1/2 x 1-3/4	1390
21267	18x25x2	17-1/2 x 24-1/2 x 1-3/4	1565
21268	20x20x2	19-1/2 x 19-1/2 x 1-3/4	1390
21269	20x24x2	19-3/8 x 23-3/8 x 1-3/4	1665
21270	20x25x2	19-1/2 x 24-1/2 x 1-3/4	1735
21271	24x24x2	23-3/8 x 23-3/8 x 1-3/4	2000
21272	25x25x2	24-1/2 x 24-1/2 x 1-3/4	2170

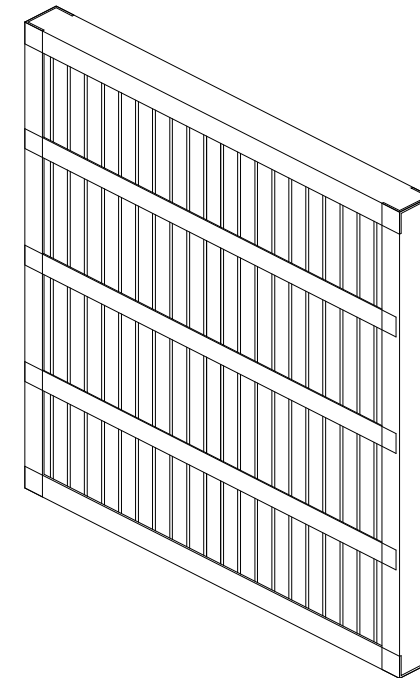

Characteristics	NOVApleat High Capacity Pleated Filter
Media	Moisture Resistant 100% Synthetic Media
Frame	Moisture resistant frame
ASHRAE Efficiency	MERV 8
Max. Temperature	150°F
Max. Humidity	100% Relative Humidity.
Flamability	UL900 Classified as to flamability only Class 2
Height Tolerance	+0 and -1/8"
Width Tolerance	+0 and -1/8"
Depth Tolerance	± 1/16"

Filter Depth	Medium Velocity (FPM)	Initial Resistance (in. wg)	High Velocity (FPM)	Initial Resistance (in. wg)	Final Resistance* (All filters) (in. wg)
2"	300	0.15	500	0.30	1.0

* Recommended final resistance. System may dictate a lower change-out point.

				Filtration Group, Inc. 912 East Washington Street Joliet, Illinois 60433	
				AEROSTAR NOVApleat High Capacity	
DR:	SC	Date:	4/7/2010	Drawing Number:	Revision:
CK:	MC	Date:	4/7/2010		