


For Sales Only

Customer Information: _____

Item Number: _____

Part Number	Nominal Size HxWxD	Media Area (ft ²)	CFM Capacities
21136	16x20x2	6.7	1110
21137	16x24x2	8.1	1335
21138	16x25x2	8.4	1390
21142	18x25x2	9.7	1565
21143	20x20x2	8.8	1390
21144	20x24x2	10.6	1665
21145	20x25x2	11.0	1735
21146	24x24x2	12.4	2000
21147	25x25x2	13.6	2170

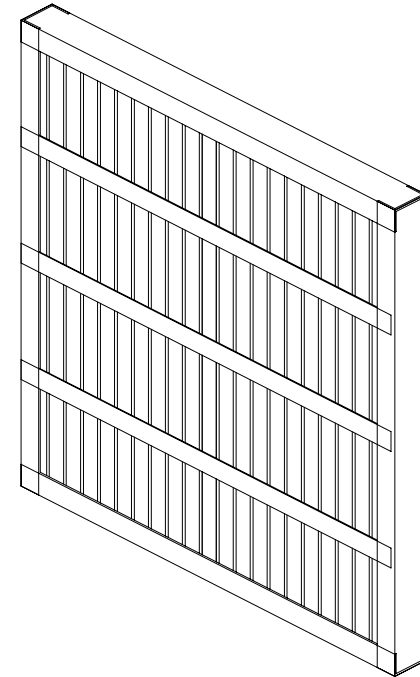

Characteristics	NOVApleat Standard Capacity Pleated Filter
Media	Moisture Resistant 100% Synthetic Media
Frame	Moisture resistant frame
ASHRAE Efficiency	MERV 6
Max. Temperature	150°F
Max. Humidity	100% Relative Humidity.
Flamability	UL900 Classified as to flamability Class 2 (R12347).
Height Tolerance	+0 and -1/8"
Width Tolerance	+0 and -1/8"
Depth Tolerance	± 1/16"
Actual Frame Size	Please contact salesperson or customer service.

Filter Depth	Medium Velocity (FPM)	Initial Resistance (in. wg)	High Velocity (FPM)	Initial Resistance (in. wg)	Final Resistance* (All filters) (in. wg)
2"	300	0.14	500	0.28	1.0

* Recommended final resistance. System may dictate a lower change-out point. (Filters tested to 1.5" wg)

For Non-Standard Sizes, Please Consult the Factory.

_____ (H) X _____ (W) X _____ (D)

Please Specify Size as Nominal or Exact _____

Customer Initial and Date for Non-Standard Size _____



Filtration Group, Inc.
912 East Washington Street
Joliet, Illinois 60433

AEROSTAR

NOVApleat Standard Capacity

DR:	SC	Date:	2/8/2006	Drawing Number:	Revision:
CK:	FH	Date:	2/8/2006		
				SD-NV-PLT	A