


For Sales Only

Customer Information: _____

Item Number: _____


| Part Number | Nominal Size HxWxD | Actual Size HxWxD | CFM Capacities |
|-------------|-----------------------|-------------------------|-------------------|
| 21131 | 12x24x2 | 11-3/8 x 23-3/8 x 1 3/4 | 1000 |
| 21136 | 16x20x2 | 15-1/2 x 19-1/2 x 1 3/4 | 1110 |
| 21137 | 16x24x2 | 15-3/8 x 23-3/8 x 1-3/4 | 1335 |
| 21138 | 16x25x2 | 15-1/2 x 24-1/2 x 1-3/4 | 1390 |
| 21142 | 18x25x2 | 17-1/2 x 24-1/2 x 1-3/4 | 1565 |
| 21143 | 20x20x2 | 19-1/2 x 19-1/2 x 1-3/4 | 1390 |
| 21144 | 20x24x2 | 19-3/8 x 23-3/8 x 1-3/4 | 1665 |
| 21145 | 20x25x2 | 19-1/2 x 24-1/2 x 1-3/4 | 1735 |
| 21146 | 24x24x2 | 23-3/8 x 23-3/8 x 1-3/4 | 2000 |
| 21147 | 25x25x2 | 24-1/2 x 24-1/2 x 1-3/4 | 2170 |

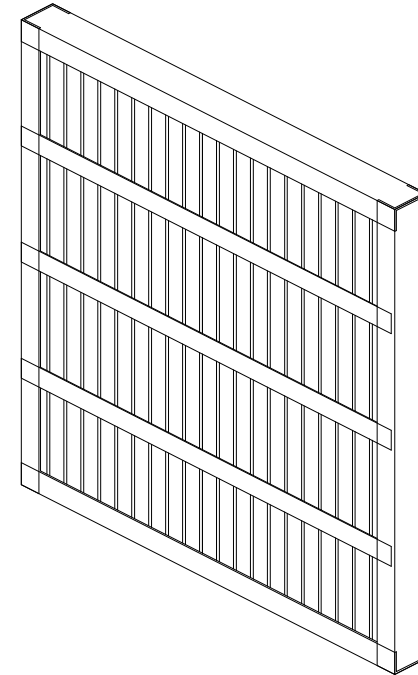

| Characteristics | NOVApleat Standard Capacity Pleated Filter |
|-------------------|---|
| Media | Moisture Resistant 100% Synthetic Media |
| Frame | Moisture resistant frame |
| ASHRAE Efficiency | MERV 8 |
| Max. Temperature | 150°F |
| Max. Humidity | 100% Relative Humidity. |
| Flamability | UL900 Classified as to flamability only Class 2 |
| Height Tolerance | +0 and -1/8" |
| Width Tolerance | +0 and -1/8" |
| Depth Tolerance | ± 1/16" |

| Filter Depth | Medium Velocity (FPM) | Initial Resistance (in. wg) | High Velocity (FPM) | Initial Resistance (in. wg) | Final Resistance* (All filters) (in. wg) |
|--------------|--------------------------|--------------------------------|------------------------|--------------------------------|---|
| 2" | 300 | 0.16 | 500 | 0.33 | 1.0 |

* Recommended final resistance. System may dictate a lower change-out point.

| | | | | |
|---|----|-------|-----------|-------------------------------------|
|  Filtration Group, Inc. 912 East Washington Street Joliet, Illinois 60433 | | | | |
| AEROSTAR | | | | |
| NOVApleat Standard Capacity | | | | |
| DR: | SC | Date: | 4/26/2011 | Drawing Number: SD-NV-PLT |
| CK: | MC | Date: | 4/26/2011 | |
| | | | | Revision: D |