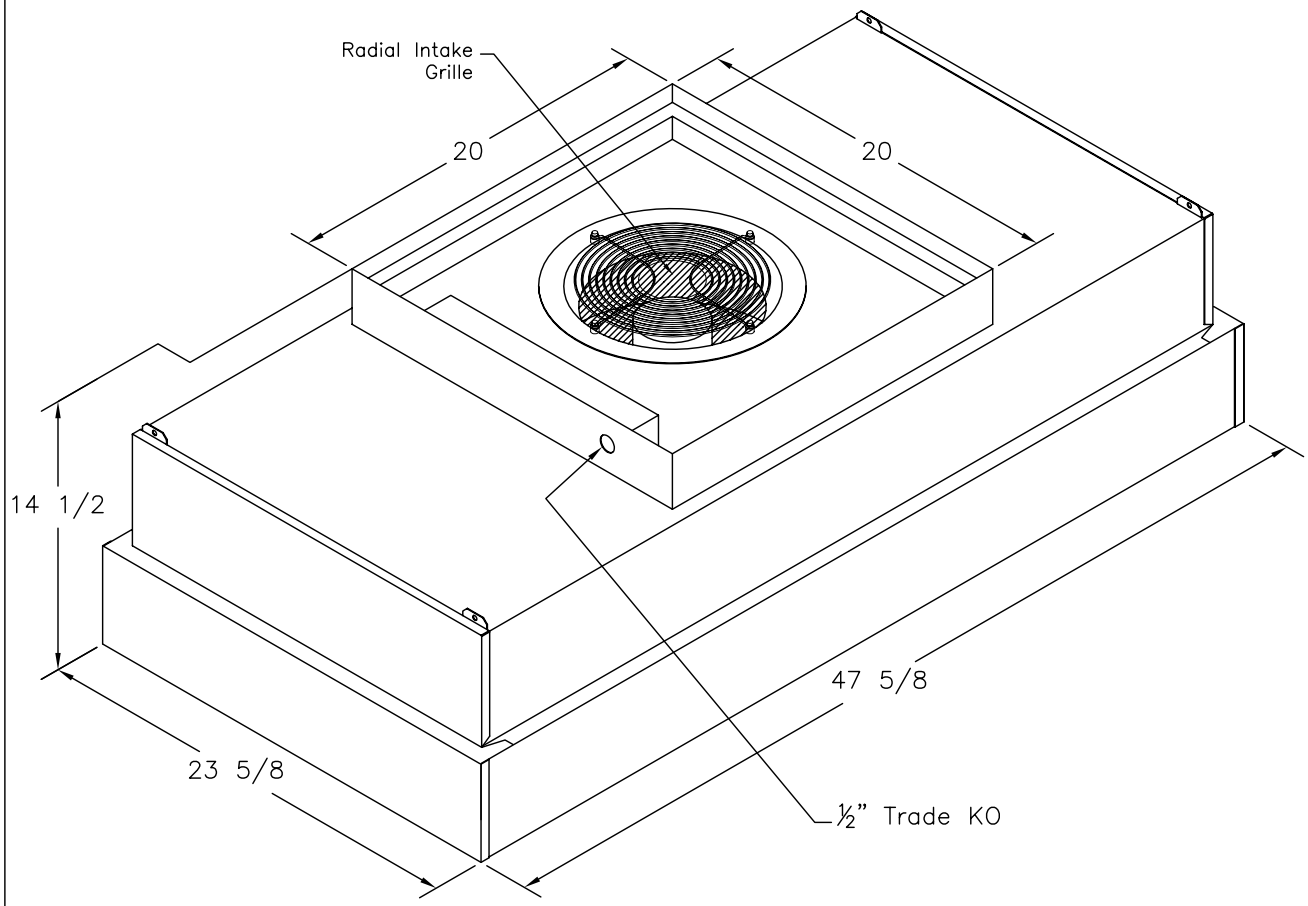

Sentinel Fan Powered Module, Ceiling Replaceable Filter

Room Side Replaceable, 2" Media Pack, 99.9995% Efficiency @ 0.12 micron, Center Divider with one Test Port for aerosol inlet concentration measurement.

Frame, Plenum and Filter Housing are White Powder Coated.

2" Pleated Prefilter (not shown)

Swing Down type anodized aluminum grille frame with a white polystyrene eggcrate louver.

115v, 1phase, 60 hz, backward curved motorized impeller.
Power consumption maximum setting < 200 watts
Start up current draw approximately 1.5 amps

Variable Speed Controller Shipped Loose for Remote Mounting.

Unit designed to deliver 90 fpm filter face velocity.

Normally rated airflow rate of 720 cfm with 0.0"w.g. external static pressure.

NOTES:
115V, 99.9995% Efficiency, Standard Painted White Finish

REV	EO NO.	BY	UPCAD DATE	REV	EO NO.	BY	UPCAD DATE	REV	EO NO.	BY	UPCAD DATE

THE DEVICE DEPICTED AND DESCRIBED HEREON EMBODIES PROPRIETARY INFORMATION OWNED BY FILTRATION GROUP INC. ALL DESIGN, MANUFACTURING, REPRODUCTION, SALES, AND PATENT RIGHTS REGARDING THIS DEVICE OR DRAWING ARE RESERVED EXCEPT WHERE EXPLICIT RIGHT IS GRANTED IN WRITING.

UNLESS OTHERWISE SPECIFIED
• ALL DIMENSIONS ARE IN INCHES
• REMOVE ALL BURRS AND SHARP EDGES
• TOLERANCES:
.XXX ± .015 | X/X ±1/16
.XX ± .03 | ∠ ±.5°
DO NOT SCALE DRAWING

FILTRATION GROUP
912 E Washington St. Joliet, IL 60433
Ph (815) 726-4600 Fax (815) 726-8912

DWN Lemmink
ENG
CHK
SCALE NTS

TITLE SEN RSR 2448 591 02B10
PART NO. "
DRAWING NO. 2170-1
RELEASE EC RELEASE_EC
SHEET SHEET1OF1