


SPECIFICATIONS

1. ASSEMBLY IS CONSTRUCTED OF EXTRUDED ALUMINUM TRACKS WITH WOVEN NYLON PILE SEAL. VERTICAL SUPPORTS ARE FORMED MILL FINISH ALUMINUM "U" CHANNELS WITH SIDE GASKETING.
2. SIDE GASKET IS COMPRESSED BY A SPRING LOADED COMPRESSION BAR ACTUATED BY A SEALING LEVER.
3. FILTER INSTALLATION IS FROM THE DOWNSTREAM ACCESS.

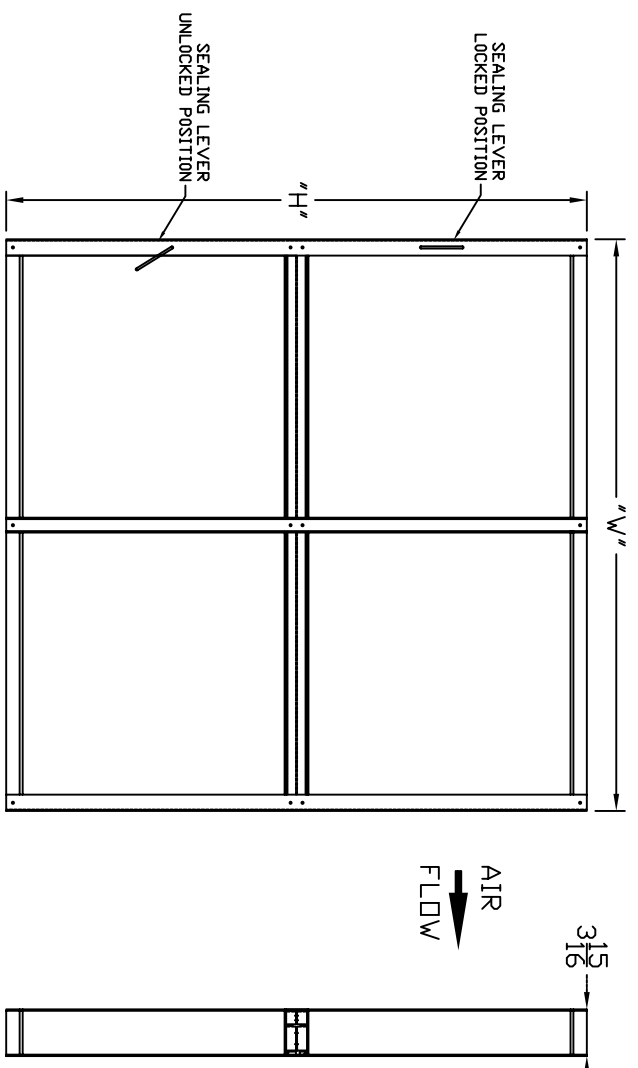

HEIGHT	DIMENSION "H"	WIDTH	DIMENSION "W"
1/2	12 1/2"	1/2	12 1/16"
1	24 1/2"	1	24 1/16"
1 1/2	36 15/16"	1 1/2	36 1/16"
2	48 13/16"	2	48 1/16"
2 1/2	61 1/4"	2 1/2	59 7/16"
3	73 1/8"	3	71 7/16"
3 1/2	85 9/16"	3 1/2	82 13/16"
4	97 7/16"	4	94 13/16"
4 1/2	109 7/8"	4 1/2	106 13/16"
5	121 3/4"	5	118 13/16"
5 1/2	134 3/16"	5 1/2	129 9/16"
6	146 1/16"	6	141 9/16"
		6 1/2	152 15/16"
		7	164 15/16"

HOUSING CONFIGURATION _____ X _____
 _____ (H) _____ (W) _____ (D)
 HOUSINGS REQUIRED: _____

- NOTES:**
 NOTES- LINE1
 NOTES- LINE2
 NOTES- LINE3
 NOTES- LINE4
 NOTES- LINE5
 NOTES- LINE6
 NOTES- LINE7
 NOTES- LINE8
 NOTES- LINE9
 NOTES- LINE10

UNLESS OTHERWISE SPECIFIED
 *TOLERANCES: X.XX ± .015 Y/Y ± 1/16 Z ± .5"
 DO NOT SCALE
 DRAWINGS

FILTRATION GROUP
 912 E. Washington St.
 Joliet, IL 60433
 Ph (815) 726-4600
 Fax (815) 726-6912

TITLE: F-TRACK
 PART NO.:
 DRAWING NO.:
 SHEET: