

Part Number	Nominal Size HxWxD	CFM Capacities
10367	12x24x1	1000
10380	12x24x2	1000
10393	12x24x4	1250
10375	20x20x1	1400
10388	20x20x2	1400
10397	20x20x4	1750
10416	20x24x1	1650
10389	20x24x2	1650
10398	20x24x4	2100
10377	24x24x1	2000
10391	24x24x2	2000
10400	24x24x4	2500


Characteristics	Aerostar Standard Capacity Pleated Filter
Media	Moisture Resistant 100% Synthetic Media
Frame	Moisture Resistant 100% Recycled Paperboard Frame
ASHRAE Efficiency	MERV 8
Max. Temperature	200°F
Max. Humidity	100% Relative Humidity
Flamability	UL900 Classified as to flamability only Class 2
Dimensional Tolerance	Height and Width: +0/ -1/8", Depth +0/ -1/16"
Actual Frame Size	Please contact local sales person or customer service for actual sizes.
Final Resistance	1.0 in. wg. Recommended for all filters. System may dictate a lower change-out point.

Filter Depth	Low Velocity Initial Resistance (in. wg.)	Medium Velocity Initial Resistance (in. wg.)	High Velocity Initial Resistance (in. wg.)
1"	0.14 at 250 FPM	0.18 at 375 FPM	0.38 at 500 FPM
2"	0.08 at 250 FPM	0.13 at 375 FPM	0.19 at 500 FPM
4"	0.08 at 375 FPM	0.12 at 500 FPM	0.18 at 625 FPM

For Sales Only

Customer Information: _____

Item Number: _____

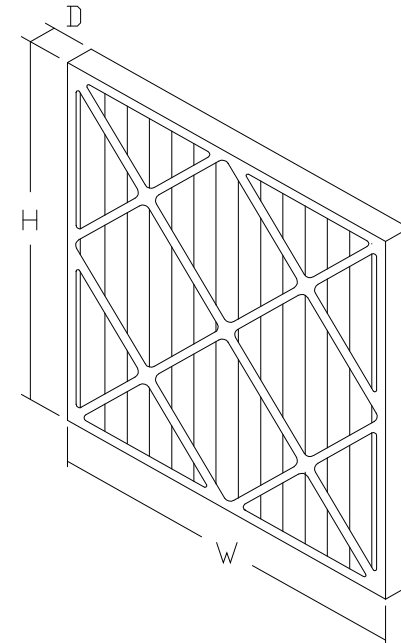

For Non-Standard Sizes, Please Consult the Factory.

_____ (H) X _____ (W) X _____ (D)

Please Specify Size as Nominal or Exact _____

Customer Initial and Date for Non-Standard Size _____



Filtration Group, Inc.
912 East Washington Street
Joliet, Illinois 60433

AEROSTAR

Series 400 Standard Capacity Pleat

DR:	SC	Date:	9/10/09	Drawing Number:	Revision:
CK:	MC	Date:	9/10/09		
				SD-SC-PLT	C