


Part Number	Filter Depth	Rated Air Flow (CFM)			Initial Resistance (in w.g.)			Media Area (ft ²)
		250 fpm	375 fpm	500 fpm	250 fpm	375 fpm	500 fpm	
MERV 14 (95%) - 24H x 24W - 8 Pocket								
18276	15	1000	1500	2000	0.16	0.34	0.58	42
18284	22	1000	1500	2000	0.14	0.25	0.36	62
18292	29	1000	1500	2000	0.09	0.21	0.33	84
18300	36	1000	1500	2000	0.06	0.21	0.36	96
MERV 13 (85%) - 24H x 24W - 8 Pocket								
18316	15	1000	1500	2000	0.12	0.23	0.42	42
18324	22	1000	1500	2000	0.08	0.19	0.3	62
18332	29	1000	1500	2000	0.05	0.17	0.29	84
18340	36	1000	1500	2000	0.06	0.2	0.34	96
MERV 12 (65%) - 24H x 24W - 8 Pocket								
18356	15	1000	1500	2000	0.09	0.21	0.36	42
18364	22	1000	1500	2000	0.07	0.17	0.27	62
18372	29	1000	1500	2000	0.04	0.15	0.26	84
18380	36	1000	1500	2000	0.08	0.18	0.28	96

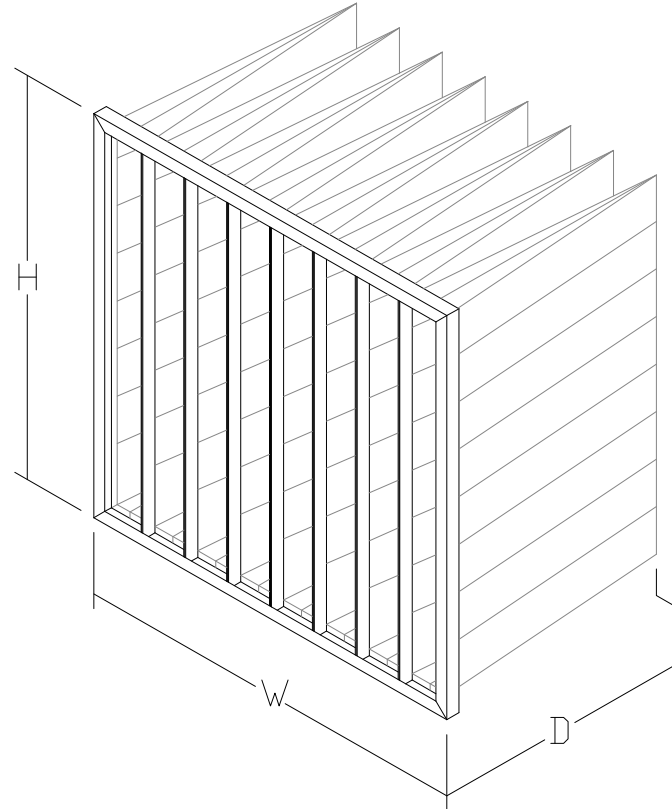

Characteristics	Aerostar SoniQ Pocket Filter
Filter Media	Meltblown Polypropylene
Header	26 ga Galvanized Steel
Flammability	UL Class 2 Standard
	UL Class 1 Optional - requires additional clips*
U.S. Patents	6,159,316 and 6,258,142 B1
Final Pressure	1.0" w.g. (Recommended) - 1.5" w.g. (Maximum)
Temperature	100°F (Constant) - 150°F (Maximum)
Actual Header	13/16" Thickness
Actual Header Face Size	Nominal less 5/8"
# Of Pockets	4, 6, 8, 10, or 12 (dependant on filter size)*

*Please contact Customer Service for more information.

_____ Include: Beauty Clip Option		_____ # of Pockets	
For Non-Standard Sizes, Please Consult the Factory.			
_____ (H) X		_____ (W) X _____ (D)	
Please Specify Size as Nominal or Exact _____			
Customer Initial and Date for Non-Standard Size _____			
Filtration Group, Inc.			
912 East Washington Street			
Joliet, Illinois 60433			
Aerostar			
SoniQ Pocket Filter			
DR:	AL	Date:	5/28/2002
CK:	JB	Date:	10/15/2004
Drawing Number:		SD-SONQ	
Revision:		C	