
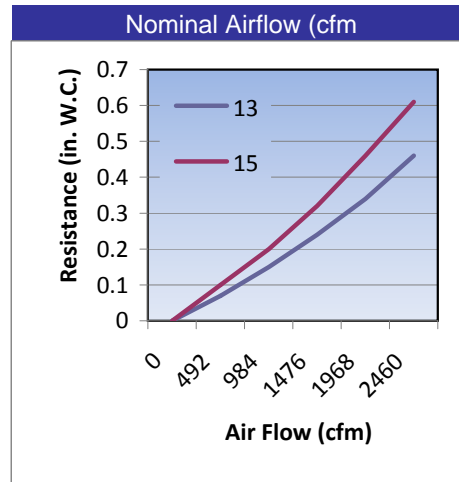



Dimensions and Performance Data			
Nominal Size HxWxD	Actual Size HxWxD	Approximate Weight (lbs.)	Media Area (sq. ft.)
12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	1.8	23
20 x 20 x 2	19-3/8 x 19-3/8 x 1-3/4	2.5	33
20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	3.0	39
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	3.6	47

Specifications
Filter frame shall be comprise of 100% high impact plastic
Filter packs shall be adhered to all sides preventing bypass
Filter media shall be comprised gradient dual density synthetic material
Filter maximum continuous operating temperature of 150BF
Filter shall be able to withstand 100% Relative Humidity
Filter shall conform to UL 900 Class 2 flammability
Filter recommended final resistance is 1.5" W.G.

Performance per ASHRAE 52.2-2007		
Model	13	15
MERV @ 2000cfm	13	15
Initial Resistance (in. W.C.)	0.35	0.45

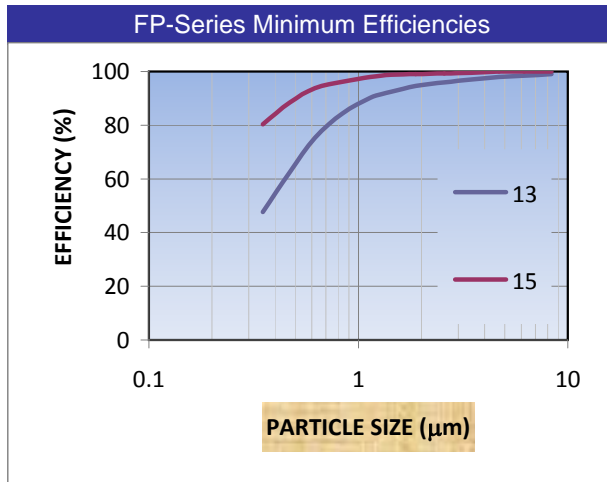

FILTRATION GROUP 2 INCH MINI-PLEAT

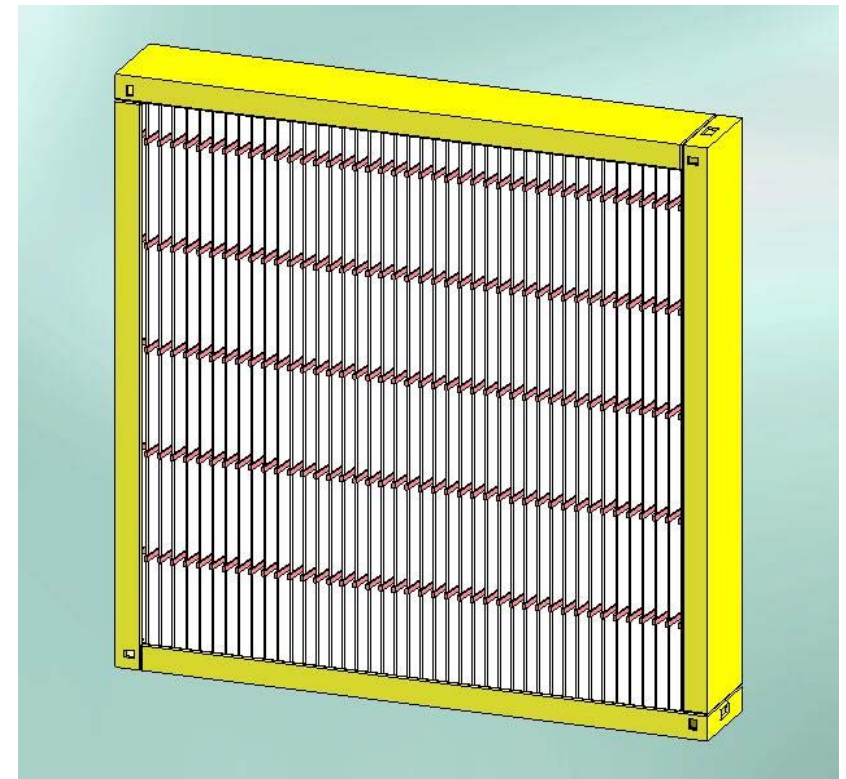

Options
1/4" Thick Gasketing - Upstream, Downstream or Side



Phone: 877-FGI-TEAM (344-8326)
 fax: 800-518-1162
www.filtrationgroup.com
 e-mail: aerostar@filtrationgroup.com